




ELECTRA E4 CX

A U D I O

804 CALLE PLANO, CAMARILLO, CA 93012 - 888.340.4403 - WWW.ILLUSIONAUDIO-AMERICA.COM

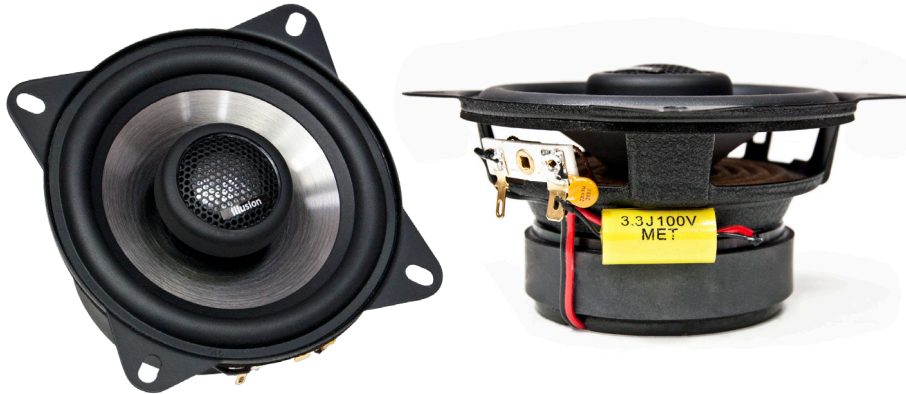

DRIVER SPECIFICATIONS

- Titanium coated injection polypropylene cone with rubber surround
- Powder-coated steel basket
- 26 mm voice coil

| | |
|--------|------------------------------|
| Fs | 113.3 Hz |
| Re | 3.36 Ohms |
| Qms | 5.46 |
| Qes | 1.0 |
| Qts | 0.845 |
| Le | 0.12 mH |
| Vas | 2.23 liter |
| Mms | 5.26 gram |
| Cms | 375 uM/Newton |
| Bl | 3.55 Tesla-M |
| SPLref | 89.9 (2.83 volts at 1 meter) |
| Sd | 65 sq cm |
| Xmax | 2 mm |
| Xsus | 9 mm |

| | |
|------------------|--------------------------------|
| Nominal Power | 40 watts |
| Maximum Power | 80 watts |
| Outside Diameter | 102 mm basket + 130 mm ears |
| Mount Hole | 94.5 mm |
| Mount Depth | 52 mm |
| Weight | 625 gram |

INTEGRATED CROSSOVER

- 12kHz, 6dB Butterworth
- Polyester capacitor
- Tweeter overload protection

COAXIAL TWEETER

- 19 mm silk dome
- 4 Ohm

